




■パンチング抜型 参考図表




順型




飛型

丸孔


千鳥抜(60°千鳥)が標準です。その他、角千鳥(45°千鳥)及び並列(直列90°)があります。

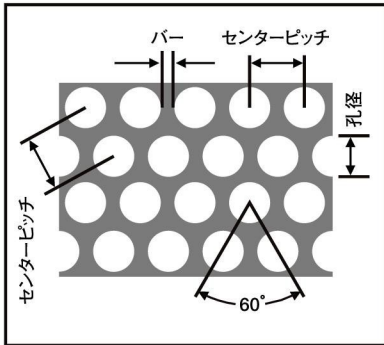

丸孔60°千鳥

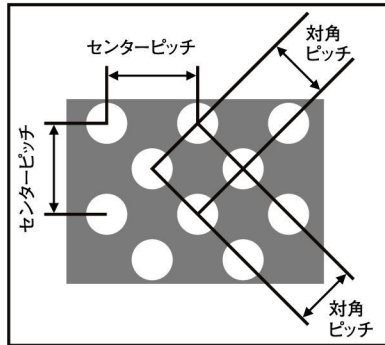


丸孔角千鳥(45°)

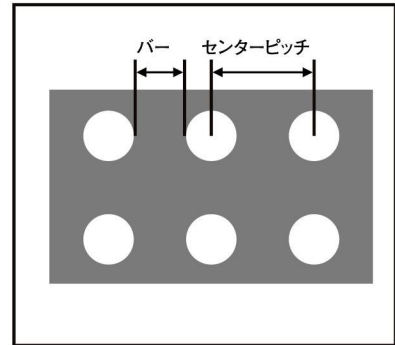


丸孔直列(90°)


1 0.5φ×1P
開孔率(約23%)




2 1φ×2P
開孔率(約23%)




3 1.5φ×3P
開孔率(約23%)



4 2φ×3.5P
開孔率(約30%)




5 3φ×4P
開孔率(約51%)



6 3φ×5P
開孔率(約33%)



7 3φ×6P
開孔率(約23%)



8 4φ×6P
開孔率(約40%)

